

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/059564 A1

(51) International Patent Classification⁷: G06K 7/08,
H03G 3/30, H04B 7/005, H04N 5/53, H04L 27/08, G10H
1/02

(21) International Application Number:
PCT/SI2003/000046

(22) International Filing Date:
22 December 2003 (22.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
P-200200316 24 December 2002 (24.12.2002) SI

(71) Applicants and

(72) Inventors: KUNC, Vinko [SI/SI]; Gerbiceva 50, 1000
Ljubljana (SI). STERN, Anton [SI/SI]; Srednja vas 34,
4208 Sencur (SI).

(74) Agent: PATENTNA PISARNA D.O.O.; Copova 14, POB
1725, 1001 Ljubljana (SI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF AUTOMATICALLY SETTING THE GAIN OF AN INTERROGATOR RECEIVER WITHIN A NON-CONTACTING IDENTIFICATION SYSTEM

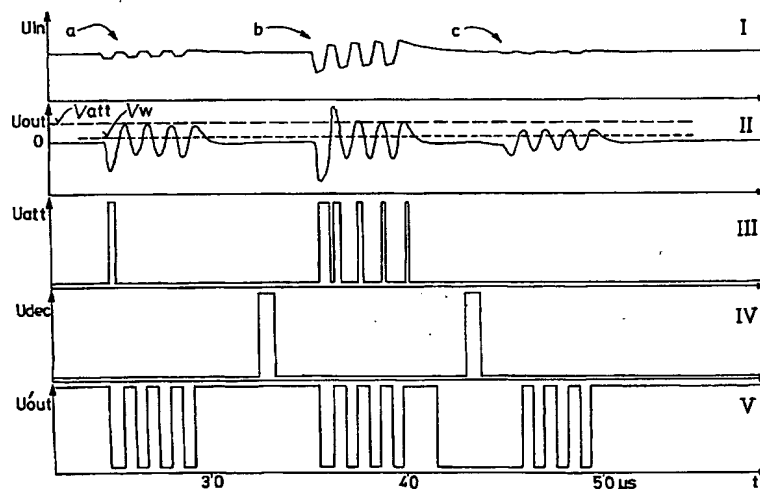

(57) Abstract: An attack is activated in a receiver amplifier of an interrogator whenever an amplified input signal exceeds an attack threshold voltage value V_{att} , and the receiver amplifier at least during a waiting period, the length of which preferably equals the double length of the longest time interval between adjacent pulses in a transponder data wave packet, after the end of the attack does not respond in the sense of setting the gain. However, the amplifier responds with a decay activated after the lapse of the waiting period, which started when the instantaneous amplified signal value for the last time after the end of the attack exceeded a waiting threshold voltage level V_w . The decay rate is of the same order of magnitude as the attack rate. The improved method for automatically setting the gain renders it possible that the interrogator receiver within the non-contacting identification system practically does not change the essential characteristics of the input signal.

10/540553

1/PRTS

JC17 Rec'd PCT/PTO 24 JUN 2005

Method for automatically setting the gain of an interrogator receiver
within a non-contacting identification system

The present invention relates to an improvement of such method for automatically setting the gain of an interrogator receiver within a non-contacting identification system, which system consists of the interrogator and several transponders, that an attack in a receiver amplifier of the interrogator is activated each time when an amplified input signal exceeds an attack threshold voltage level, and a decay is activated after the attack has ended, the improvement being accomplished by means of considering at the characteristics of the communication between the interrogator and the transponders.

A non-contacting identification system consists of an interrogator generating radio frequency electromagnetic waves, and of one or several transponders, for which said electromagnetic waves represent an energy source. The transponders send data to the interrogator by transmitting appropriately modulated waves as received.

Variations, as produced by said modulation, in the level of the received signal are amplified in a receiver of the interrogator. In order to cover the largest possible communication space region, the receiver has the largest gain as allowed by the input noise level. The range of levels of the received signal is namely rather wide since the distance between the interrogator and any one of the transponders may be quite

different, actually from practically zero to the largest distance across which the communication is still possible. Therefore the receiver has a high gain to reliably receive even very low input signals. In order that no difficulties at the amplification of high input signals appear, any known method is used, which are of two kinds: either the amplified input signal is limited or the receiver gain is automatically adjusted to the input signal level.

In the known methods of the first kind the amplified input signal is limited in the amplifying stage, in which a resistor in an amplifier feed-back loop is shunted by a Zener diode; when the signal amplitude exceeds the Zener diode threshold, the gain is immediately reduced. A drawback is that the ratio of the useful signal to the noise signal at the output of the amplifier is worse than at its input.

In the known methods of the second kind the gain is set automatically, *e.g.* according to patent US 5,929,706. They are especially known in the field of telecommunications and audio systems. According to this method, when the input signal level is high, the gain of the receiving path is automatically adjusted, *i.e.* lowered, so that the received signal remains within the linear receiver operation region.

When an overly high signal is detected, an attack is activated, so a rapid gain lowering is started until an appropriate signal height is attained. At that moment or when the signal ceases to exist, the decay begins. So the gain rises slowly to a high level, on which the system persists till the next attack. When the sine-shaped input signal is high for a fairly long time, the output amplitude is really lowered below the limit of a gain correcting activation, yet the decay again raises the output signal out of the linearity region and therefore the attack is activated once again. The system permanently switches over between the states of the attack and the decay. The attack rate must be several orders of magnitude above the decay rate, moreover, both rates must be matched to the nature and the frequency spectrum of the input signals.

In patent US 6,122,331 a circuit with an automatically settable gain is disclosed, wherein the attack and the decay are not activated with a constant time delay after the signal has crossed the higher first and the lower second level, respectively. The time intervals when the signal height is close to zero, are selected as preferred regions for the gain-change of a continuous signal, whereby an output signal is distorted to a lowest degree. The circuit is foreseen for continuous signals and does not exploit the characteristics of pulsating signals in the form of wave packets.

Consequently, the technical problem to be solved by the present invention is how to improve a method for automatically setting the gain of an interrogator receiver within a non-contacting identification system so that, regardless of a large or small distance of an individual transponder from the interrogator, the level of the received signal in final amplification stages of this receiver will be below the upper limit of the linear region, whereat the improvement should be based on the characteristics of transponder signals in the form of wave packets.

The said technical problem is solved by a method for automatically setting the gain of an interrogator receiver within a non-contacting identification system consisting of the interrogator and several transponders, according to which method, within a receiver amplifier of the interrogator, an attack is activated each time when an amplified input signal exceeds an attack threshold voltage level V_{att} , and a decay is activated after the attack has ended, the method of the invention being characterized in that the amplifier responds with a decay activated after the lapse of a waiting period, which started when the instantaneous amplified signal value for the last time after the end of the attack exceeded a waiting threshold voltage level V_w .

The method of the invention is further characterized in that the decay rate is of the same order of magnitude as the attack rate and that the length of the waiting period

equals a double length of the longest time interval between adjacent pulses in a transponder data wave packet.

The method for automatically setting the gain as improved by the invention renders it possible that the interrogator receiver within a non-contacting identification system practically does not change the essential characteristics of the input signal.

The invention will now be explained in more detail by way of the description of an embodiment and with reference to the accompanying drawing, which in the sole Figure represents the time dependence of the voltage at an input and output of a receiver amplifier in an interrogator, an attack signal and a decay signal and the time dependence of the voltage at the output of the receiver amplifier in a digital representation for three wave packets having different intensities.

In a non-contacting identification system, which consists of an interrogator and several transponders, an improved method for automatically setting the gain of an interrogator receiver is used.

The known method, according to which in a receiver amplifier of the interrogator an attack is activated each time when an amplified input signal exceeds an attack threshold voltage level V_{att} and a decay is activated after the attack has ended, is improved by the invention as follows.

After the attack has ended, a waiting phase is provided, in which the amplifier does not respond in the sense of gain-setting. However, the amplifier responds with a decay after the lapse of a waiting period, which started when the instantaneous amplified

signal value for the last time after the end of the attack exceeded a waiting threshold voltage level V_w .

The shortest and the longest time interval between adjacent pulses in a data wave packet are precisely determined by the communication protocol: signal frequency spectrum is namely known and it can be exactly determined for the purpose of the method of the invention when the data wave packet ceased to arrive, in order that a fast decay is activated after the lapse of the waiting period. However, it is also known that the input signal level in the data wave packet is nearly constant, and it is expected that the transponder can not considerably change its position during the transmission of a particular data wave packet. Therefore, the gain is set at the beginning of the wave packet arrival and it is retained constant till the wave packet arrival has ceased. Herefrom the following requirements are derived, which render possible that the interrogator receiver within the non-contacting identification system, functioning according to the improved method for automatically setting its gain, practically does not change the essential characteristics of the input signal.

The decay rate is high and of the same order of magnitude as the attack rate. The length of the waiting period equals the double length of a longest time interval between adjacent pulses in the transponder data wave packet.

However, the attack rate must be high enough that an appropriate signal level is established already after initial pulses of the data wave packet.

Since the interrogator, *e.g.* after it has completed the communication with a first transponder situated near to the interrogator aerial, thus with a strong received signal, may begin to communicate with a remote another transponder, the received signal of which is weak, the decay rate must also be high in order that the amplifier quickly reaches a high gain.

Thus the interrogator, wherein the method of the invention for automatically setting the gain of its receiver is applied, has three operation phases: the attack, the waiting and the decay.

The method of the invention for automatically setting the gain of interrogator receiver within a non-contacting identification system functions as follows. The attack is activated by the input signal U_{in} , the output signal U_{out} of which exceeds the attack threshold voltage level V_{att} . The attack continues until the output signal U_{out} drops below the attack threshold voltage level V_{att} . Then a waiting phase sets in, the length of which equals at least the length of the waiting period; during the waiting phase the gain remains unchanged. The decay is activated after the lapse of the waiting period, which started when the instantaneous amplified signal value for the last time after the end of the attack exceeded a waiting threshold voltage level V_w .

In a first window I in the Figure the input signal U_{in} for three successive data wave packets is shown: the packet a arrived from a relatively close transponder, the packet b from a rather close transponder and the packet c from a remote transponder. In the second window II the analogous output signal U_{out} corresponding to the data wave packets a, b, c, and the (positive) attack threshold voltage level V_{att} and the waiting threshold voltage level V_w are plotted, whereas the digital output signal U'_{out} is represented in a window V. The digital output signal U'_{out} for all three data wave packets a, b, c has nearly the same form in spite of their large difference in intensity. In windows III and IV an attack signal U_{att} and a decay signal U_{dec} are represented, which are activated in response to said three data wave packets a, b and c according to the proposed method.

At the arrival of the first data wave packet an attack is activated, which lasts until the output signal U_{out} drops below the attack threshold voltage level V_{att} . Then the gain remains unchanged until the amplifier responds with the decay. The decay is activated

after the lapse of the waiting period, which started when the instantaneous amplified signal value for the last time after the end of the attack exceeded the waiting threshold voltage level V_w .

At the arrival of the second data wave packet b the attack is activated. The decay lasts practically the whole time, while the wave packet b arrives; the output signal U_{out} namely exceeds the attack threshold voltage level V_{att} even at the lowest settable gain. After the lapse of the waiting period following the cease of the data wave packet, the gain is reset to its highest value.

Claims

1. Method for automatically setting the gain of an interrogator receiver within a non-contacting identification system consisting of the interrogator and several transponders,

according to which method, within a receiver amplifier of the interrogator, an attack is activated each time when an amplified input signal exceeds an attack threshold voltage level V_{att} , and a decay is activated after the attack has ended, characterized in

that the amplifier responds with a decay activated after the lapse of a waiting period which started when the instantaneous amplified signal value for the last time after the end of the attack exceeded a waiting threshold voltage level V_w .

2. Method as recited in claim 1, characterized in

that the decay rate is of the same order of magnitude as the attack rate.

3. Method as recited in claim 1 or 2, characterized in

that the length of the waiting period equals a double length of the longest time interval between the adjacent pulses in a transponder data wave packet.

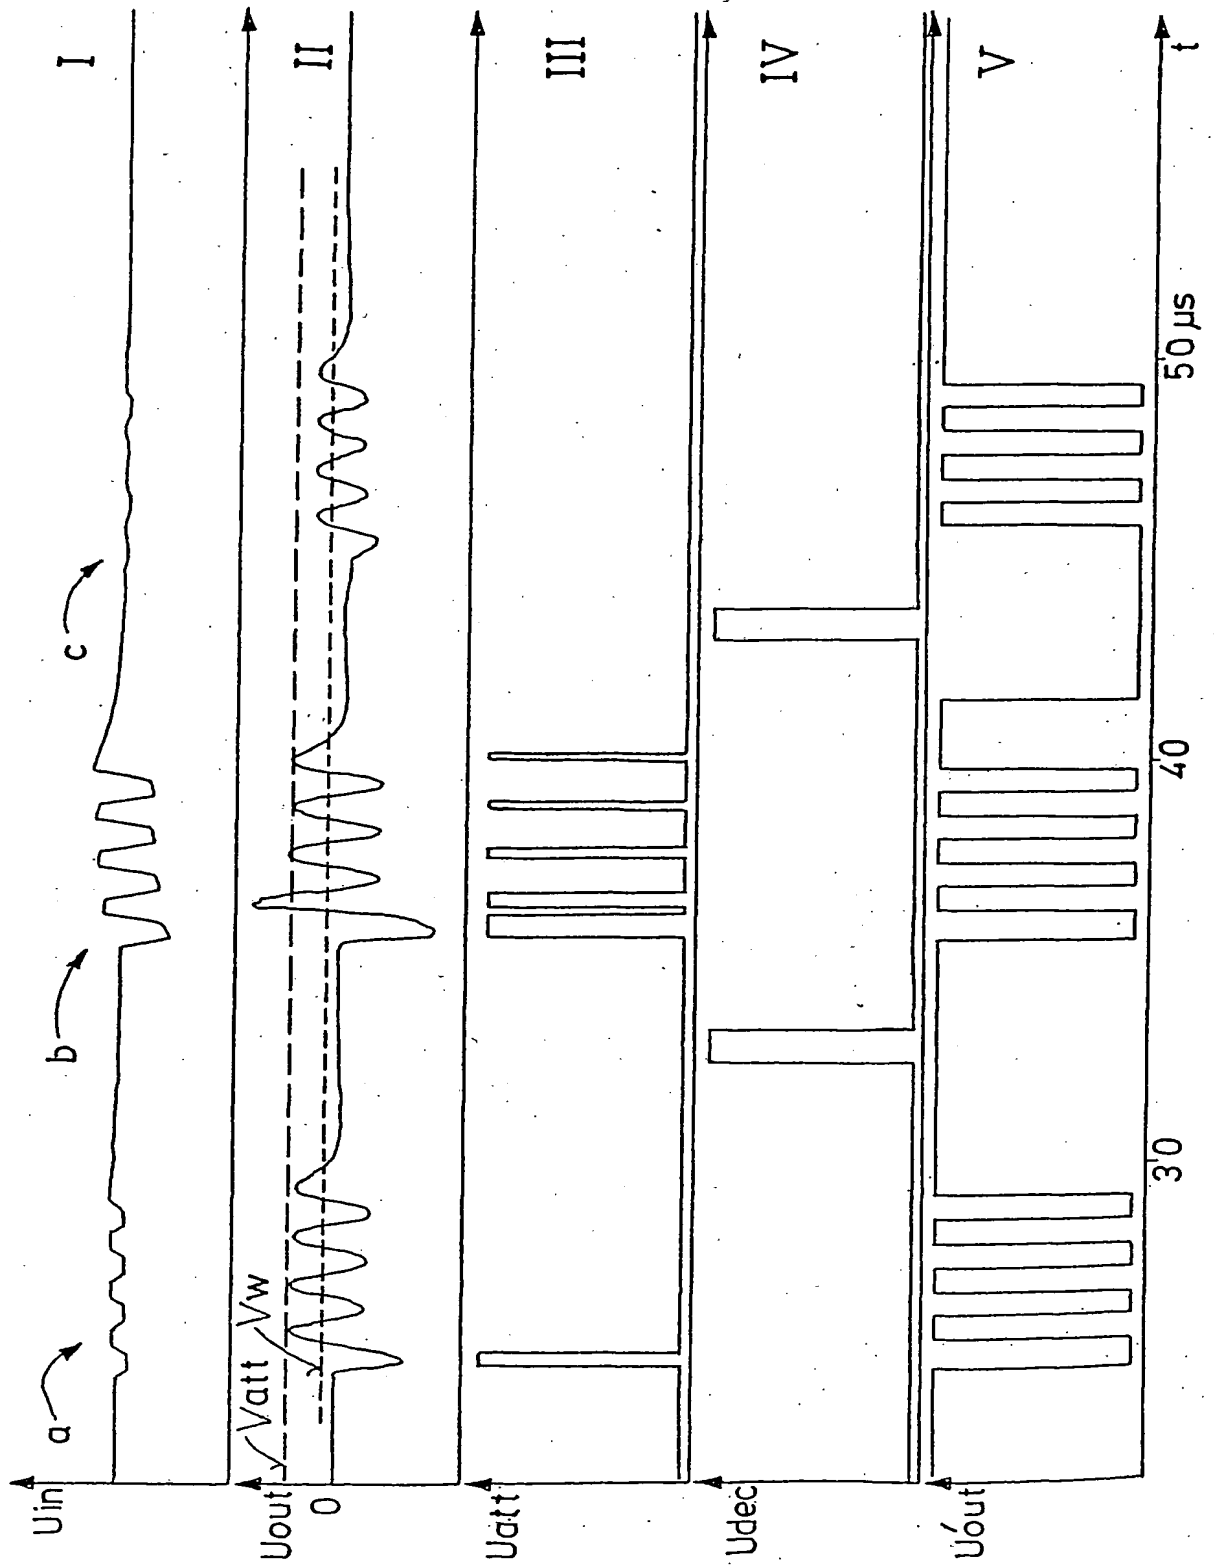


FIGURE 1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SI 03/00046

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K7/08 H03G3/30 H04B7/005 H04N5/53 H04L27/08
G10H1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K H03G H04B H04N H04L G10H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 122 331 A (DUMAS JEROME) 19 September 2000 (2000-09-19) cited in the application column 3, line 5 - line 42; figure 4	1-3
Y	US 5 721 552 A (ROSSIUS HANS-ULRICH ET AL) 24 February 1998 (1998-02-24) column 2, line 53 - line 56	1-3
A	US 4 893 539 A (NISHIMOTO TETSUO) 16 January 1990 (1990-01-16) column 1, line 27 - line 31; figure 9	1-3

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

13 April 2004

Date of mailing of the international search report

21/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Heusler, N

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SI 03/00046

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6122331	A	19-09-2000	CA 2337379 A1	21-12-2000
			CN 1312971 T	12-09-2001
			EP 1110307 A1	27-06-2001
			JP 2003502897 T	21-01-2003
			NO 20010753 A	14-02-2001
			TW 441168 B	16-06-2001
			WO 0077924 A1	21-12-2000
US 5721552	A	24-02-1998	DE 4333964 A1	13-04-1995
			CZ 9600977 A3	16-04-1997
			WO 9510096 A1	13-04-1995
			DE 59403680 D1	11-09-1997
			EP 0722595 A1	24-07-1996
			ES 2106561 T3	01-11-1997
			HU 73367 A2	29-07-1996
			JP 9509794 T	30-09-1997
US 4893539	A	16-01-1990	JP 7069693 B	31-07-1995
			JP 62265697 A	18-11-1987